

FIG. 1

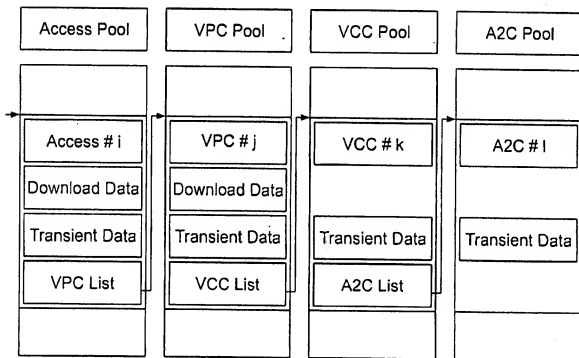


FIG. 2

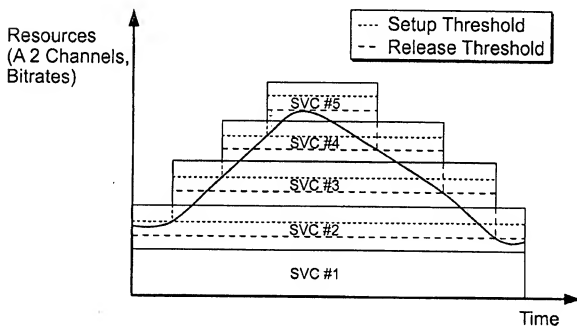


FIG. 3

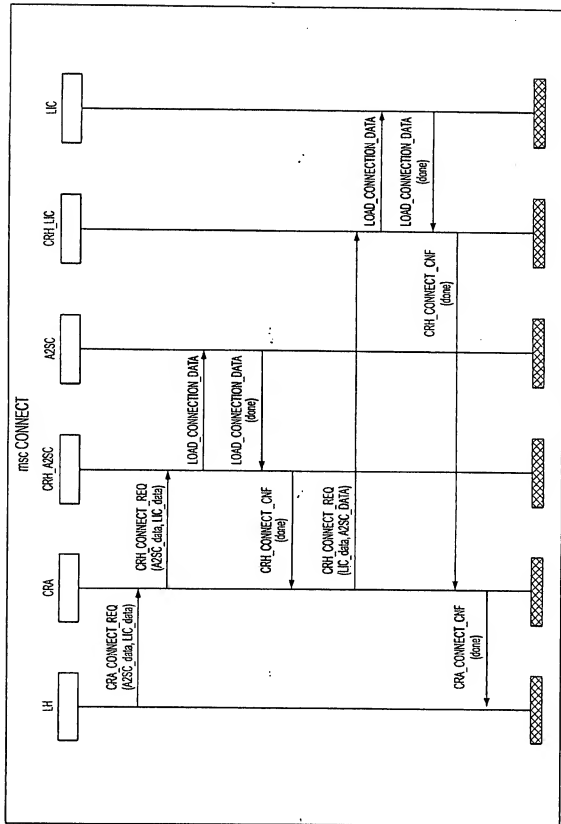


FIG. 4

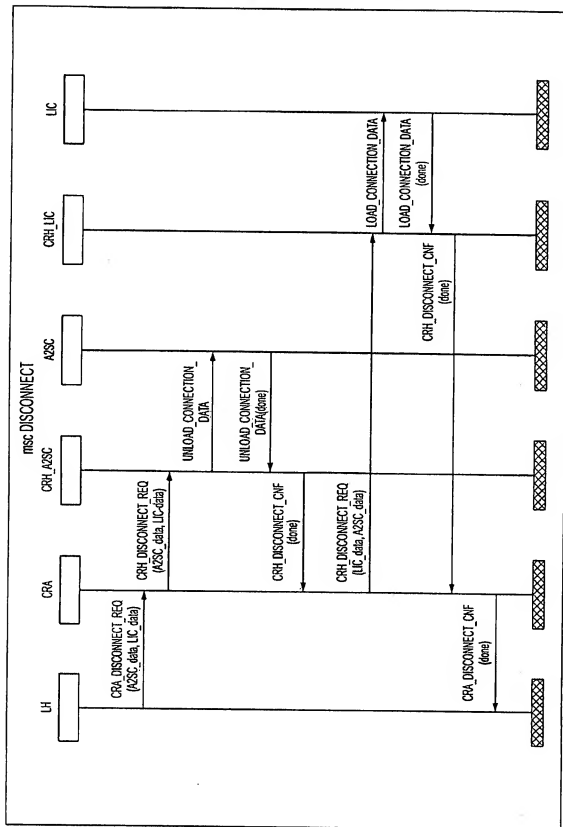


FIG. 5

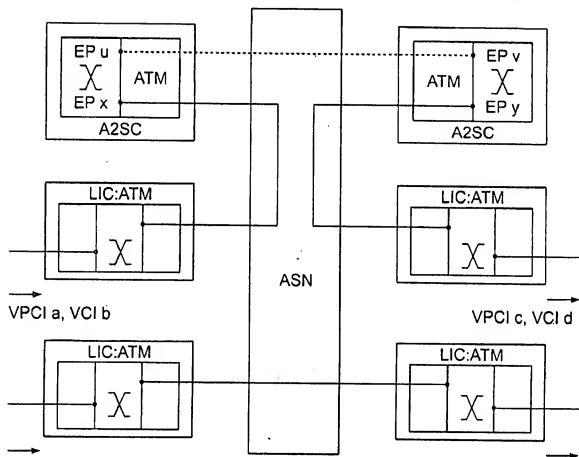


FIG. 6

Parameters	Meaning
S, S0, S1, S2	Source of the setup request (e.g. AESA address identifying a network element)
T	Target of the setup request (format as above)
CC	Connection characteristics: A set of parameters describing SVC connection characteristics (cell rates, traffic type, path type, AAL2 parameters, QoS parameters, etc ...)
P, P0, P1, P2	AAL type 2 paths
A, A0, A1, A2	Accesses
VP	Virtual path, virtual path connection
VC	Virtual channel

FIG. 7

**FIG. 8**

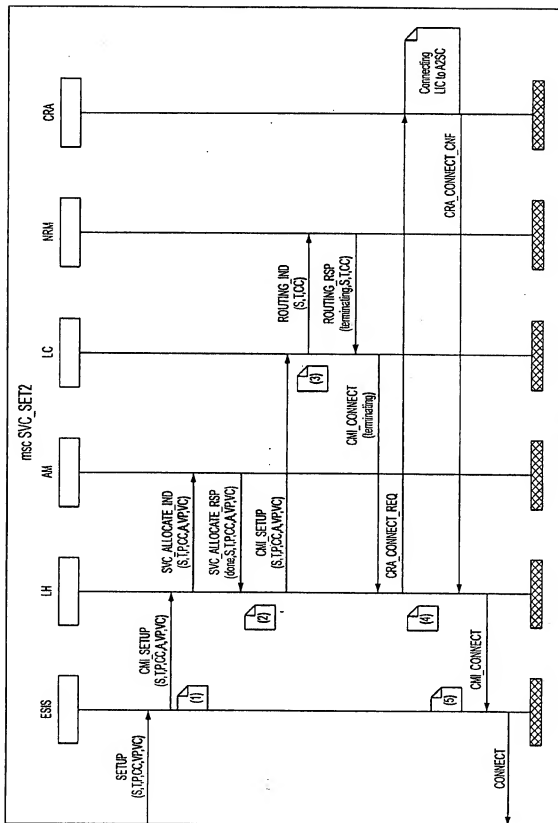


FIG. 9



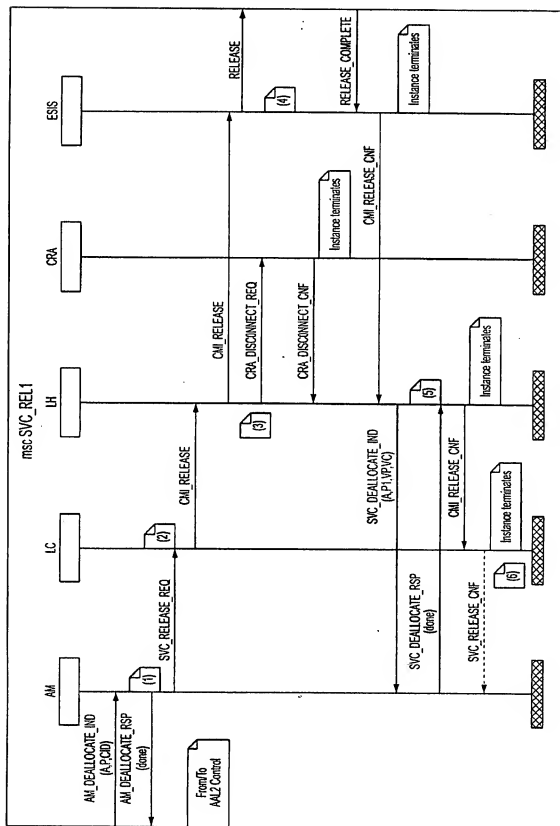


FIG. 10

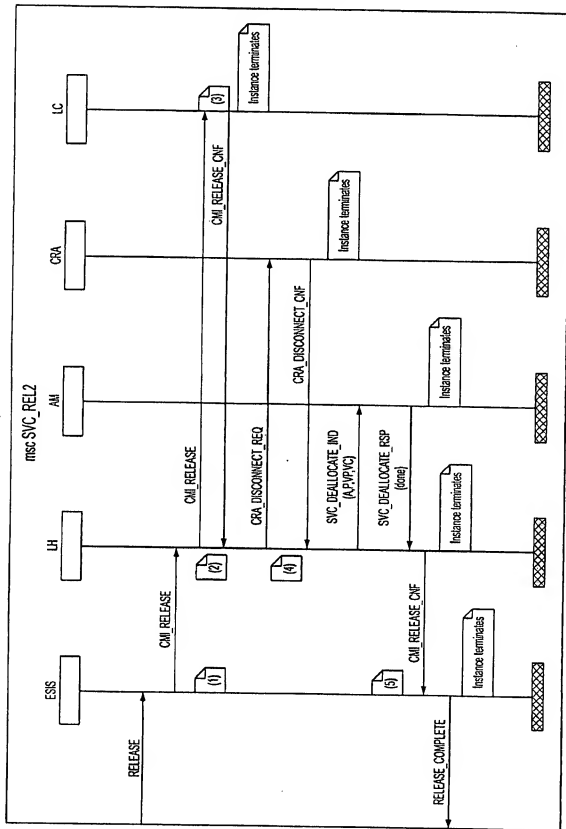


FIG. 11